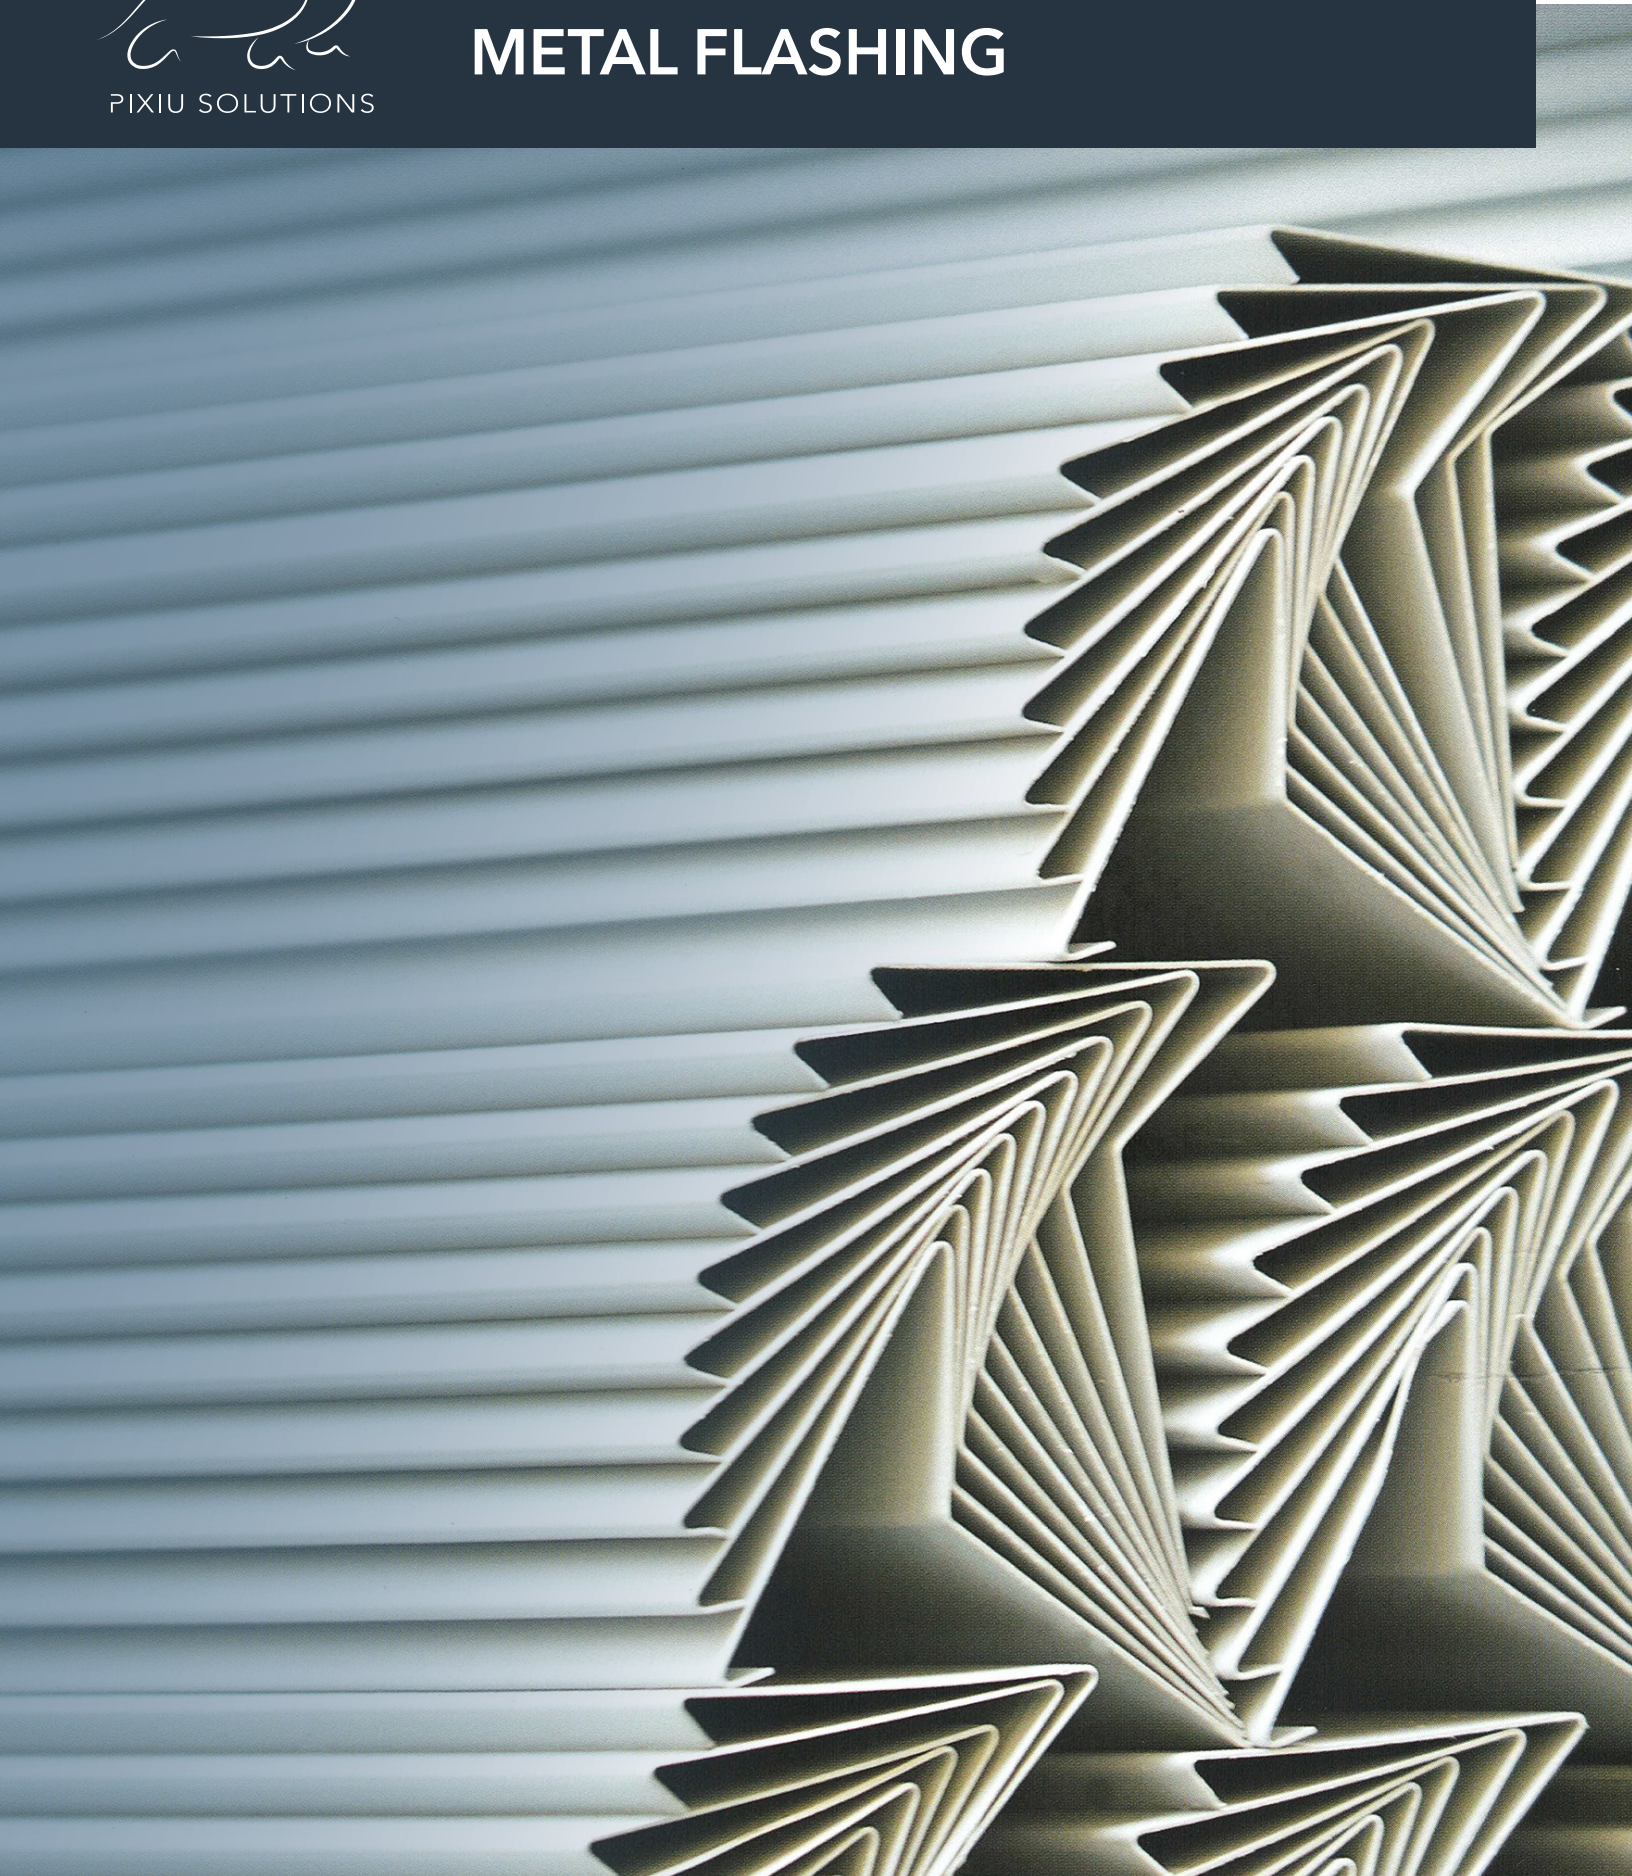




PVC COATED METAL FLASHING





PVC COATED METAL FLASHING


Suggested Application:

Linear anchoring applications and circumferential flashing elements of PVC waterproofing membranes. Plumbing elements and profiles for detailing of roofs, balconies, loggia, cornices, parapets, etc.

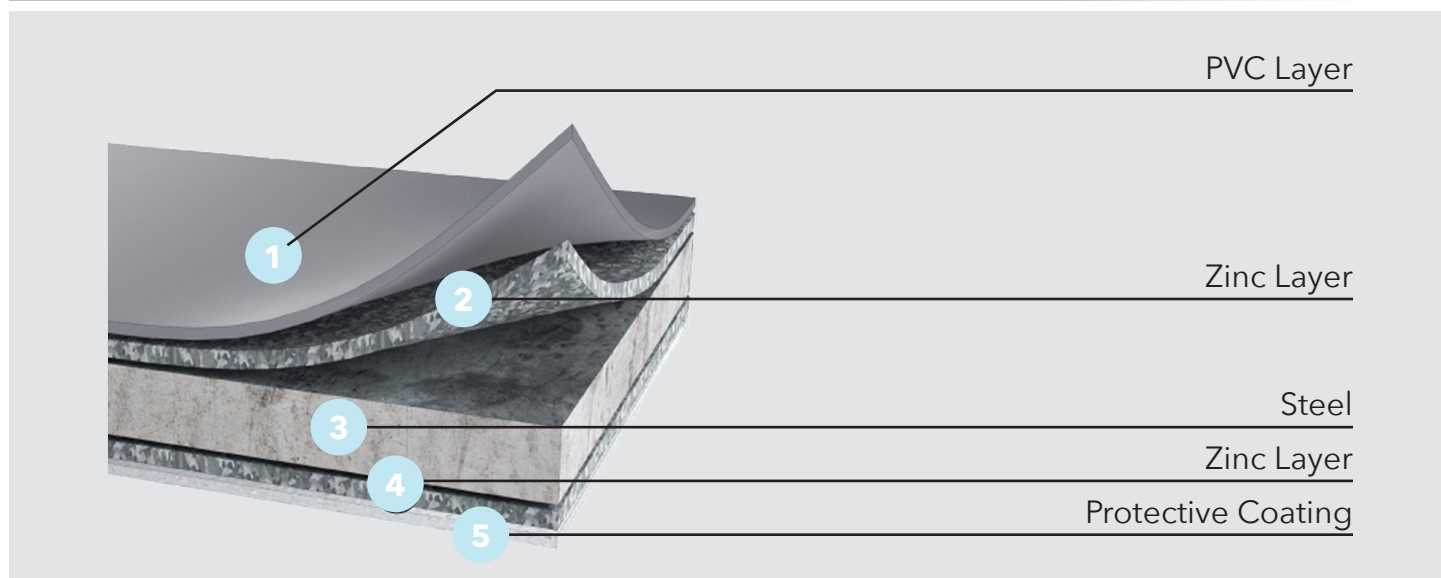
PVC COATED L-METAL SHEETS

Sheet:	DX51D
Type:	Galvanized 0.55 mm steel sheet, bottom side coated with grey lacquer
PVC membrane on face side:	PVC-P, 0.6 mm; stabilized against weather influences and UV Radiation
Standard coil dimensions:	1000 x 3000 mm
Packing:	50 sheets / pallet
Weight (1 sheet):	Approx. 10,5 kg
Fire resistance:	EN 13501-1, class E
Fire resistance:	EN 13501-5, classification BROOF (t3)
Colours:	White RAL 9010, Black RAL 9011, Copper Brown RAL 8004, Light Grey RAL 7040






COLOURS

	RAL 9010 WHITE		RAL 9011 BLACK		RAL 8004 COPPER BROWN		RAL 7040 LIGHT GREY
--	-------------------	---	-------------------	---	-----------------------------	---	------------------------

PVC COATED METAL STRUCTURE



TYPES OF PROFILES AND DIMENSIONS

Profile Number		Profile Title	Profile Scheme and Application	Developed Width (mm)	Length Dimensions ()				Angle Dimensions ()		
Position	Variety				a	b	c	d			
1	A	Inner L-Profile		70	50	20	-	-	95	-	-
	B			100	60	40	-	-	95	-	-
2	A	Outer L-Profile		70	50	20	-	-	95	-	-
				100	60	40	-	-	95	-	-
3	A	Sealing Profile		70	10	10	50	-	145	-	-
	B			70	10	10	50	-	180	-	-
4	A	Wallstripe		100	15	75	10	-	92	-	-
5	A	Drip Mould Normal		150	10	30	110	-	45	115	-
	B			200	10	30	160	-	35	115	-
	C			250	10	30	210	-	45	115	-
	D			330	10	30	290	-	45	115	-
6	B	Hook-Shaped Drip Mold		250	10	100	60	80	45	33	118
	C			300	10	100	60	130	45	33	118
7	A	Sealing L-Profile		250W	10	10	160	70	180	95	-

PVC COATED LS-COILS

Sheet:	DX51D + Z 275
Type:	Galvanized steel sheet, 0.55 mm, bottom side coated with grey lacquer
PVC membrane on face side:	PVC-P, 0,6 mm; stabilized against weather influences and UV radiation
Standard coil dimensions:	1000 x 30000 mm
Packing:	4 coils / pallet
Coil weight:	Approx. 170 kg
Minimum ordering quantity:	1 coil
Colours:	Light Grey RAL 7040



Tel: 877-752-4565

Fax: 519-753-7009



www.pixiusolutions.com

sales@pixiusolutions.com



PIXIU SOLUTIONS



@pixiusolutions